



DIACHLOR™ SERIES SUPER COAGULANT


WHAT IS DIACHLOR™ SUPER COAGULANT?

Our super coagulant is special formulated polyaluminium chloride (PAC) having high concentration of polymerized aluminium chain.

Our super coagulant promotes sustainability with **ZERO WASTE** production.

Our super coagulant produces **HEALTHY** drinking water because it leaves very minimal (sometimes undetectable) traces of residue aluminium, which has been linked to adverse health effects.

Our super coagulant is **ENVIRONMENTALLY FRIENDLY** because it produces less hazardous sludge in water and wastewater treatment.

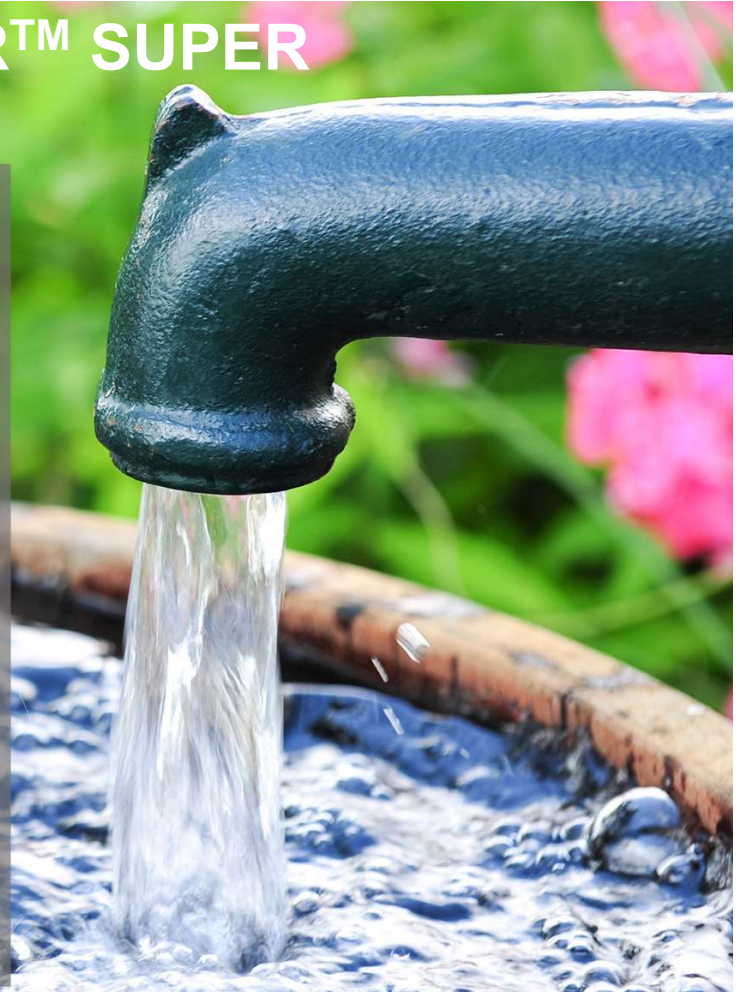

DIACHLOR™ PRODUCTS RANGE

- Polyaluminium Chloride (PAC) Type 1
- Polyaluminium Chloride (PAC) Type 2
- Polyaluminium Chloride (PAC) Type 3
- Aluminium Chlorohydrate (ACH)



**ENVIROMENTAL
FRIENDLY**



**LESS SLUDGE
PRODUCTION**




COST SAVING



**STRONGER &
DENSER FLOC**



**SAFE IN FOOD &
PHARMA INDUSTRY**



**LESS DOSAGE
LESS CONSUMPTION**

DIACHLOR™ PAC TYPE 2

SUPER COAGULANT FOR DRINKING WATER & WASTEWATER TREATMENT

Specifications for DIACHLOR™ Polyaluminium Chloride (PAC) Type 2

Parameter	Unit	Type 2
Density (Ambient temperature)	g/ml	1.18 - 1.35
Aluminium Oxide (Al ₂ O ₃)	% w/w	15, min
Basicity	% w/w	35 – 83
pH	1% w/v solution	3.5 - 5.0
Sulphate ion (SO ₄ ²⁻)	% w/w	3.5, max
Insoluble matter	% w/w	1
Total Iron (Fe)	% w/w	0.05
Ammoniacal Nitrogen (N)	% w/w	0.01
Arsenic (As)	mg/kg	3.7
Manganese (Mn)	mg/kg	28.1
Cadmium (Cd)	mg/kg	4.7
Chromium (Cr)	mg/kg	65.6
Mercury (Hg)	mg/kg	0.9
Nickel (Ni)	mg/kg	65.6
Lead (Pb)	mg/kg	18.7
Antimony (Sb)	mg/kg	3.7
Selenium (Se)	mg/kg	3.7



DIACHLOR™
PAC Type 2



1157-03/2012



Certified to
NSF/ANSI/CAN 60



SIRIM

Certified to: MS 1454: 2007
Certification No: PC000527

Key Features

- Readily available in liquid form and use as received
- Remain as clear liquid and stable over time
- Packaging available in carboys, IBC tote bin, and flexibag
- High basicity requires less alkali
- Effective in water & wastewater treatment system
- Stable & consistent quality
- Applicable in any process requires clarification
- Work in high and low temperature environments

For enquiries:

E-mail: info@dia-chemical.com

Contact: +603-7845 7895

TESTIMONIAL

DIACHLOR™ SERIES SUPER COAGULANT JAR TEST OBSERVATION




Raw
wastewater

Treated with
PAC

Treated with
DIACHLOR™

Jar Test for Caramel Refinery Wastewater

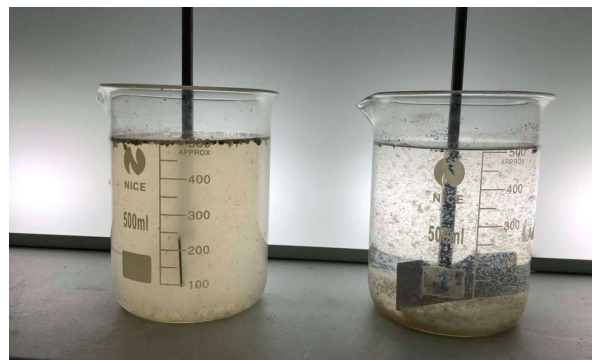

With 10ppm
PAC

With 10ppm
DIACHLOR™

Jar Test for Oil Refinery Wastewater

Above pictures show a comparison between conventional PAC & DIACHLOR™ PAC performance towards industrial wastewater applications.

The comparisons were conducted under optimum conditions of conventional PAC and DIACHLOR™ PAC with the similar grade and dosage.

OUR PRODUCTS

- DIACHLOR™ SERIES COAGULANTS
- POLYFLOC SERIES FLOCCULANTS
- OTHER SPECIALTY CHEMICALS
 - EMULSION BREAKER EL-1000
 - AMMONIA REMOVAL AMRemove-1000
 - BIOGAS BOOST 1000

OUR SERVICES

- JAR TEST ANALYSIS
- BIOMETHANE POTENTIAL MEASUREMENT
- WATER & WASTEWATER ANALYSIS
- ENGINEERING SERVICES
- TURNKEY PROJECT FOR TREATMENT PLANTS
- EPCC FOR TREATMENT PLANTS

For more details, please visit us at www.dia-chemical.com

CERTIFIED BY



DIA-Chemical Sdn Bhd

Tel: +03 – 7845 7895 (Office)

Tel: +03 – 8920 7713 (Factory)

Website: www.dia-chemical.com

Office: 40, Jalan Apollo U5/193, Bandar Pinggiran Subang, 40150 Shah Alam, Selangor

Factory: 7, Jalan Perindustrian SIS, Taman Perindustrian SIS 228, 43700 Beranang, Selangor



DIA-Chemical Sdn Bhd

DIA-Chemical Sdn Bhd

Tel: +03 – 7845 7895 (Office)

Tel: +03 – 8920 7713 (Factory)

Website: www.dia-chemical.com

Office: 40, Jalan Apollo U5/193, Bandar Pinggiran Subang, 40150 Shah Alam, Selangor

Factory: 7, Jalan Perindustrian SIS, Taman Perindustrian SIS 228, 43700 Beranang, Selangor